




Lightning / Surge Protector




Compact, Din-rail Mounted Design Protects Signal, Supply and Shield Lines Gas Discharge Tube Design

APPLICATIONS

For load Cells, Strain Gauges and RTDs

Perfect for Weigh Stations and Weighbridges

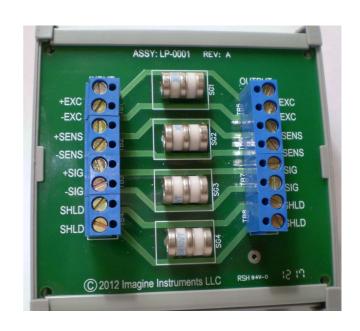









DESCRIPTION

Model LP1S3-90-DR is a single stage din-rail mounted surge protector. This model is designed for use with resistance temperature detectors (RTDs), load cells, weighbridges, and strain gauge sensors. The unit provides maximum protection on the signal lines, excitation, sense lines and shield.

SPECIFICATIONS

Clamping Voltage: ± 90 Volts Connection: Screw terminal

Enclosure: Din-rail Polycarbonate

Operating temperature: -40 – 180 °F (-40 - 82 °C)

© 2012 :: Imagine Instruments LLC :: 7365 Main Street, #176 :: Stratford, CT 06614 :: p. 203.610.3909 e-mail: info@imagineinstruments.com :: www.imagineinstruments.com

Note: Continued product improvements make specifications subject to change without notice. Check www.imagineinstruments.com for the latest product information and updates

Released: 20 May, 2012 :: Rev: A